


## User's Quick Guide

### 1-to-3 10/100/1000Base-T Regeneration Tap


(Model No. ETAP-1105 and ETAP-2105)

*(Patent Pending)*

### RJ45 JACKS & DC Power Jack

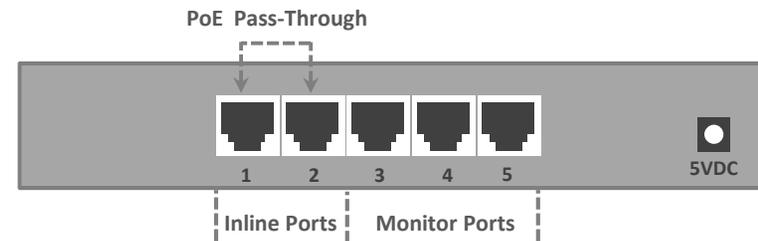

10/100Base-T Model

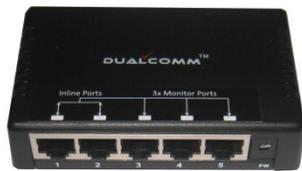

ETAP-1105

10/100/1000Base-T Model



ETAP-2105

#### Main Features:

- “Hardwired” duplication of monitored inline traffic to 3 monitoring ports. No user configuration is needed.
- Power-over-Ethernet (PoE) Pass-Through. Use of the Tap device does not disrupt the delivery of PoE inline power .
- USB Powered. No AC/DC adapter is needed. The unit can be conveniently powered from a computer's USB port.

More information is available at:

<http://www.dual-comm.com/dualcomm-easytap.htm>

#### Package Contents:

- One ETAP-1105 or ETAP-2105 Ethernet regeneration tap unit
- One USB power cable

#### Inline Ports & Monitor Ports:


Inline Ports Port 1 and 2;

Monitor Ports Port 3, 4 and 5.

#### PoE Pass-Through:

PoE inline power arriving at Port 1 will be passed to Port 2; PoE inline power arriving at Port 2 will be passed to Port 1.

#### Status LEDs

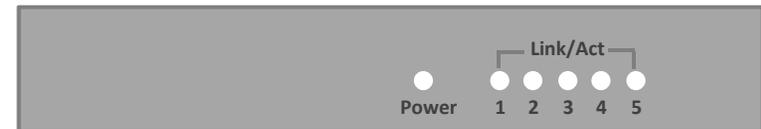

The following LED indicators are on the front panel:

#### Power LED:

This green LED is tuned on when the device receives external input power properly.

#### Port Status LEDs:

Each network port has a LED to indicate the speed and link/activity status of the port as defined below:

Speed ETAP-2105: Green ON= 1000Mbps; Amber ON= 10 or 100Mbps  
ETAP-1105: Green ON= 10 or 100Mbps

Link/Act Solid ON= link Up; Blinking = Sending/Receiving Packets